

Use of Sensitivity Analysis to Assess the Effect of Model Uncertainty in Analyzing Accelerated Life Test Data

William Q. Meeker	Luis A. Escobar
Dept. of Statistics	Dept. of Experimental Statistics
Iowa State University	Louisiana State University
Ames, IA 50011	Baton Rouge, LA 70803

Steve A. Zayac
1610 Christian Hills Drive
Rochester, MI

Abstract

Accelerated life tests are used to obtain timely information on the durability and reliability of materials. Test units are subjected to higher than usual levels of “stress” and a model is used to estimate life at use conditions. Although it is desirable to use a physically-based model to justify the required extrapolation, in many practical situations, no such model is available or the physical basis for extrapolation is uncertain. In such situations, extrapolation is based on an empirical model. Sensitivity analysis tools then become important to assess the effect of model error and to allow engineers to make safe design decisions. This paper presents models, methods, and a description of software tools for performing systematic sensitivity analysis to assess potential model error. These methods are illustrated with an experiment that was conducted to determine if the fatigue life of a spring would meet a given specification.

Key words: Box-Cox Transformation, Censored Data, Empirical Models, Extrapolation, Fatigue, Maximum Likelihood, Reliability, Weibull Distribution.

1 Introduction

1.1 Background

Product engineers needed information about the reliability of a spring in order to assess trade offs and to make design decisions for a product. In general, there is a tradeoff between the amount of displacement allowed in the motion of the spring and performance of the product. More displacement leads to higher performance but shorter fatigue life. A large experiment was conducted to determine if a new processing method would improve fatigue life of the spring and to obtain a quantitative description of the displacement-life relationship.

In order to protect proprietary data and information, we generated simulated data from the fitted model for the original application, modified the scale of the data, and changed the name of one of the experimental factors. Largely, however, the nature of the application is the same as the original.

1.2 The experiment

A sample of 108 springs, divided equally between the new and the old processing method, were tested until failure or 5000 kilocycles (which ever came first). Two other factors, processing temperature and stroke displacement (distance that the spring was compressed in each cycle of the test) were varied in a two by three factorial arrangement with replication. Thus the overall experiment was a $2 \times 2 \times 3$ factorial, and the assignment of units to levels of stress and run order were randomized. From this experiment, the engineers could develop a regression relationship to describe the effects that the experimental variables have on spring life. Stroke displacement was used as an accelerating variable. Nominal processing temperature and use conditions for these springs are 600°F and a stroke displacement of 20 mils, respectively (a mil is 1/1000 of an inch).

The goal of the experiment was to determine if the new processing method was better than the old method and to see if the spring would have a B10 life (the time by which one expects 10% of the devices to fail) equal to at least 500 megacycles (500,000 kilocycles) at use conditions. This customer specification would imply that no more than 10% percent of the springs would fail before the end of the technological life of the product in applications where the displacement would be 20 mils. If the specification cannot be met, then the product engineers want to know the amount of displacement that would be safe to use (the spring could still be used in the product by limiting displacement with some loss of product performance).

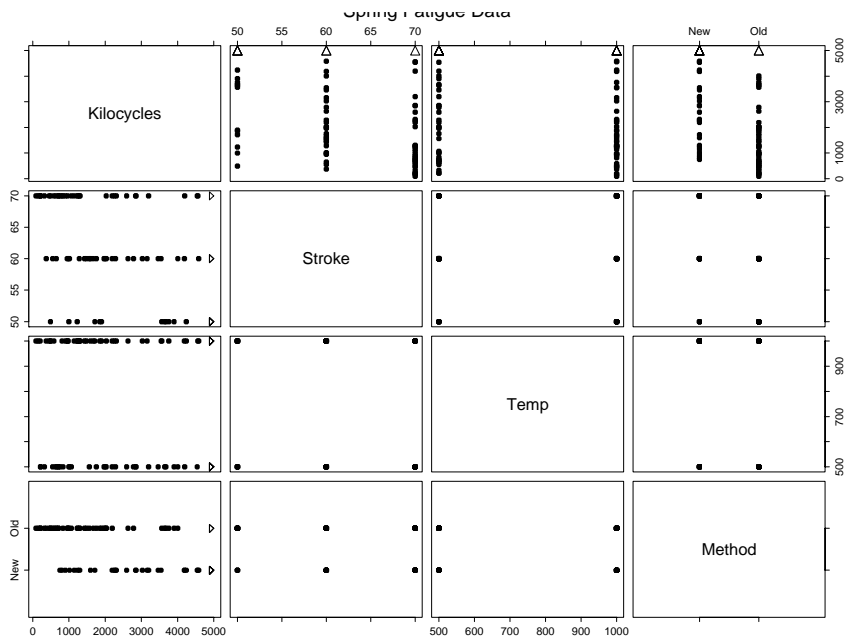


Figure 1: Pairs plot of the spring accelerated life test data.

1.3 The data

The data from the spring accelerated life test are given in Table 4 in Appendix B. Time is in units of kilocycles to failure. The explanatory variables are Temp in degrees Fahrenheit, Stroke in mils, and the class variable Method which takes the values New or Old. Springs that had not failed after 5000 kilocycles were coded as “Suspended.” Note that at the condition 50 mils, 500°F, and the New processing method, there were no failures before 5000 kilocycles. All of the other conditions had at least some failures and at five of the twelve conditions, all of the springs failed. At some of the conditions, one or more of the springs had not failed after 5000 kilocycles. When the number of censored observations at a condition is greater than one, it appears in the data matrix only once, with the Number column indicating the multiplicity.

Figure 1 is a pairs plot of the spring accelerated life test data. The open triangles indicate right-censored observations. The plot provides a visualization of the experimental layout. Also, the plot of Kilocycles versus Method suggests that springs manufactured with the NewMethod have longer lives.

1.4 Related literature

Nelson (1990) comprehensively discusses useful models and statistical methods for accelerated testing. This is an important reference and many of the ideas presented in this paper are implicit in Nelson's extensive treatment of this subject. Chapters 18-22 of Meeker and Escobar (1998) provide some materials that complement Nelson (1990). Wu and Hamada (2000) and Condra (2001) are other useful references on the use of designed experiments to improve product reliability.

1.5 Overview

Section 2 describes some initial analyses of the accelerated life test data, allowing an assessment of some of the important model assumptions. Section 3 illustrates the fitting of a response-surface acceleration model. Section 4 studies carefully the effect that Stroke displacement has on spring life, including various sensitivity analyses of model assumptions. Section 5 makes concluding remarks and outlines some possible areas for further work.

1.6 Software

The analyses here were done with SPLIDA (SPlus Life Data Analysis), a collection of S-PLUS functions with a graphical interface (GUI), designed for the analysis of reliability data. The most up-to-date version of SPLIDA can be downloaded from www.public.iastate.edu/~splida. Although some of the basic analyses might be possible in advanced statistical packages like JMP, SAS, or MINITAB, the sensitivity analysis would probably require programming.

2 Weibull Distribution and Initial Data Analysis

2.1 Individual analyses at each factor-level combination

Analysis of accelerated life test data usually begins by fitting, individually, one or more distributions to data from each factor-level combination (or, more precisely, at those combinations where there were failures). We will illustrate fitting models based on the Weibull distribution. Other distributions were also investigated (details are not given here), but the Weibull seemed to provide the best fit to the data.

The Weibull distribution cdf is

$$F(t) = \Pr(T \leq t; \eta, \beta) = 1 - \exp \left[- \left(\frac{t}{\eta} \right)^\beta \right], \quad t > 0. \quad (1)$$

In this parameterization, $\beta > 0$ is a shape parameter and $\eta > 0$ is a scale parameter as well as the approximate .632 quantile. The practical value of the Weibull distribution stems from its ability to describe failure distributions with many different commonly occurring shapes. See Section 4.8 of Meeker and Escobar (1998) for more information.

The Weibull distribution is a log-location-scale distribution. In particular, the logarithm of a Weibull random variable has a smallest extreme value distribution with location parameter $\mu = \log(\eta)$ and scale parameter $\sigma = 1/\beta$. In this form, the Weibull cdf is

$$F(t; \mu, \sigma) = \Phi_{\text{sev}} \left[\frac{\log(t) - \mu}{\sigma} \right], \quad t > 0 \quad (2)$$

where $\Phi_{\text{sev}}(z) = 1 - \exp[-\exp(z)]$ is the cdf of the standardized ($\mu = 0, \sigma = 1$) smallest extreme value distribution. This parameterization is more convenient for regression modeling of simple relationships between log life and explanatory variables (log-linear models). For more discussion of log-location-scale distributions and log-linear models, see Chapters 4 and 17, respectively, in Meeker and Escobar (1998).

Maximum likelihood (ML) estimation is the standard method for parameter estimation with censored data. In large samples, ML estimators have desirable statistical properties. These methods as described in detail in Chapters 8 and 17 of Meeker and Escobar (1998) and Nelson (1990). Figure 2 is a Weibull probability plot showing individual ML fits for each of the 11 factor-level combinations that had failures. The straight lines on the plots are the individual ML estimates of the cdf at each factor-level combination. The differing slopes of the lines correspond to the differing Weibull shape parameter estimates. The steeper slopes correspond to conditions that had less spread in the data. Figure 3 provides the same information, but without the legend and with the plot axis chosen to show the data with better resolution. The ML estimates of the Weibull parameters and corresponding standard errors are given in Table 1 for each condition.

2.2 Individual analyses with common Weibull shape parameter

Commonly used regression models for accelerated life tests assume that the scale parameter $\sigma = 1/\beta$ does not depend on the explanatory variables. Meeker and Escobar (1998) show how this simple model is implied by simple physical/chemical based models (e.g., a one step chemical degradation reaction). On the other hand, it is easy to find counter examples to this model, both in physical theory and in data (e.g., Pascual and Meeker, 1999). In any case, it is important to assess the adequacy of this model assumption. To do this, we fit a model with a separate distribution for each test condition where there were failures, but with a common Weibull shape parameter. We call this the “floating scale model.” Fitting the floating scale model is similar to the traditional one-way

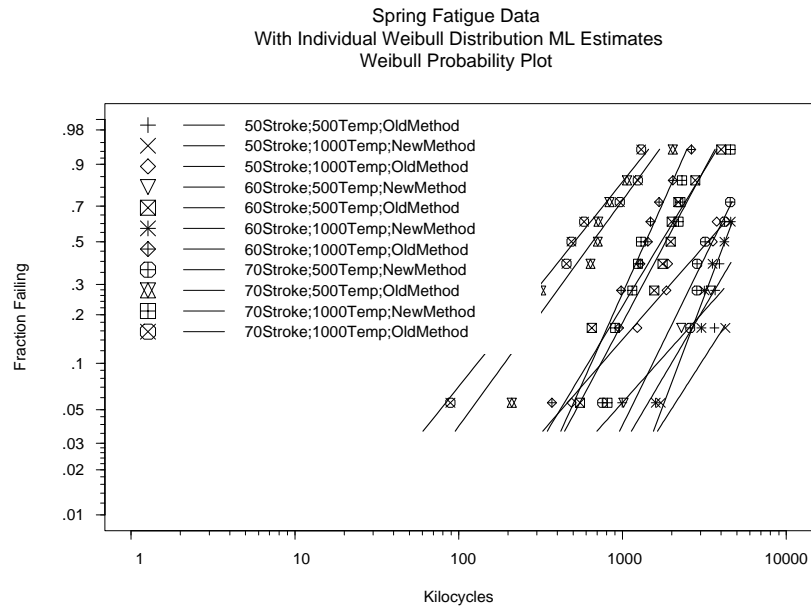


Figure 2: Weibull probability plot of the spring accelerated life test data with individual ML estimates of $F(t)$ and legend.

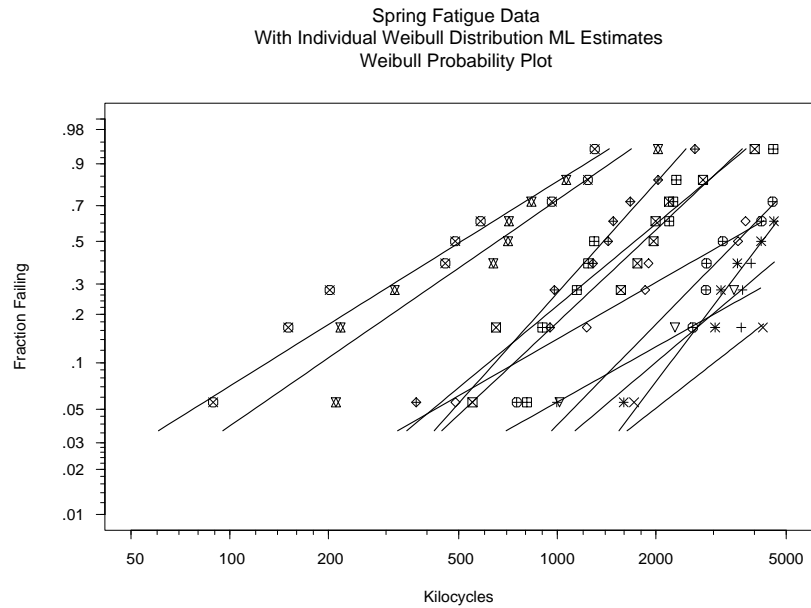


Figure 3: Weibull probability plot of the spring accelerated life test data with individual ML estimates of $F(t)$ using data-defined Kilocycles axis and no legend.

Table 1: Weibull ML estimates of the individual parameters (η, β) at distinct factor-level combinations for the spring accelerated life test data.

Spring Fatigue Data

Maximum likelihood estimation results:

Response units: Kilocycles

Weibull Distribution

	Stroke, Temp, Method	Log likelihood	eta	se_eta	beta	se_beta
1	50Stroke;500Temp;NewMethod	NA	NA	NA	NA	NA
2	50Stroke;500Temp;OldMethod	-39.85	6639.6	2122.7	1.868	0.8845
3	50Stroke;1000Temp;NewMethod	-21.59	11104.8	7802.6	1.723	1.1772
4	50Stroke;1000Temp;OldMethod	-56.45	4430.4	1446.9	1.265	0.4536
5	60Stroke;500Temp;NewMethod	-31.17	10101.2	6480.1	1.236	0.6723
6	60Stroke;500Temp;OldMethod	-74.39	2193.1	372.5	2.067	0.5406
7	60Stroke;1000Temp;NewMethod	-55.10	4781.6	677.9	2.920	1.0591
8	60Stroke;1000Temp;OldMethod	-70.45	1606.2	228.4	2.466	0.6460
9	70Stroke;500Temp;NewMethod	-63.58	4169.5	700.5	2.250	0.7468
10	70Stroke;500Temp;OldMethod	-67.43	835.9	194.1	1.521	0.3799
11	70Stroke;1000Temp;NewMethod	-74.49	2108.8	408.3	1.831	0.4420
12	70Stroke;1000Temp;OldMethod	-66.08	665.7	169.7	1.378	0.3730

Total log likelihood= -620.6

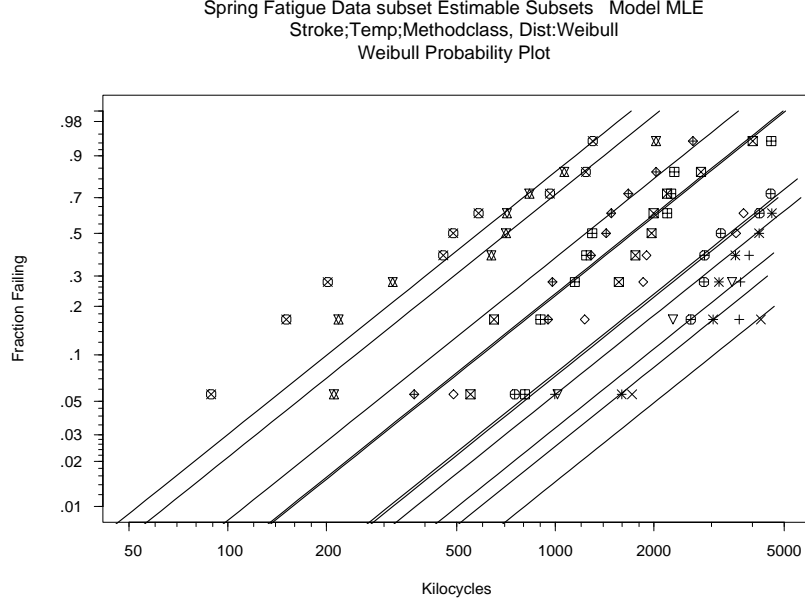


Figure 4: Weibull probability plot of the spring accelerated life test data with individual ML estimates of $F(t)$, assuming a common Weibull shape parameter.

analysis of variance, but allows for censoring and distributions other than normal (or lognormal).

Figure 4 is a Weibull probability plot, similar to Figure 3, but with parallel lines, reflecting the common Weibull shape parameter in the floating scale model that was fitted to the data. The results of this model fit, including approximate 95% confidence intervals for the model parameters, are given in Table 2. The Intercept parameter estimate corresponds to the location parameter μ at the baseline condition “60Stroke; 500Temp; NewMethod,” which we denote by μ_{base} . The other regression coefficients estimate $\mu_i - \mu_{\text{base}}$ where the index i corresponds to each of the other factor-level combinations (except for “50Stroke; 500Temp; NewMethod” where there were no failures). Table 2 also provides ML estimates of the common Weibull shape parameter β and $\sigma = 1/\beta$.

2.3 Test for Weibull shape parameter homogeneity

Comparing Figures 3 and 4 show some differences among the shape parameter estimates obtained from the individual ML fits and the ML estimate obtained from the floating scale model. A formal test can be used to see if the observed differences can be explained by natural variability under the floating scale model. From Tables 1 and 2, the total log likelihood values from the corresponding models are -620.6 and -623.9 , respectively. The log likelihood ratio statistic for the comparison is

Table 2: Weibull ML estimate of the floating scale model for the spring accelerated life test data

Spring Fatigue Data

Maximum likelihood estimation results:

Response units: Kilocycles

Weibull Distribution

Relationship(s)

1 StrokeTempMethod: class

Model formula:

Location ~ StrokeTempMethod

Log likelihood at maximum point: -623.9

Parameter	Approx Conf. Interval				
	MLE	Std.Err.	95% Lower	95% Upper	
Intercept	8.9828	0.33058	8.3349	9.6307	
70Stroke;500Temp;NewMethod	-0.6426	0.39322	-1.4133	0.1281	
50Stroke;500Temp;OldMethod	-0.1609	0.43220	-1.0080	0.6862	
60Stroke; 500Temp;OldMethod	-1.3203	0.38343	-2.0718	-0.5688	
70Stroke; 500Temp;OldMethod	-2.2057	0.38629	-2.9628	-1.4486	
50Stroke;1000Temp;NewMethod	0.3113	0.51700	-0.7020	1.3246	
60Stroke;1000Temp;NewMethod	-0.4542	0.40150	-1.2412	0.3327	
70Stroke;1000Temp;NewMethod	-1.3383	0.38483	-2.0925	-0.5840	
50Stroke;1000Temp;OldMethod	-0.6151	0.40279	-1.4046	0.1743	
60Stroke;1000Temp;OldMethod	-1.6525	0.38263	-2.4025	-0.9026	
70Stroke;1000Temp;OldMethod	-2.4059	0.38573	-3.1619	-1.6499	
sigma	0.5656	0.05429	0.4686	0.6827	
weibull.beta	1.7680	0.16970	1.4649	2.1340	

$Q = 2 \times (-620.6 - (-623.9)) = 6.6$. In large samples, under the null hypothesis that the Weibull shape parameter is the same in all groups, the log likelihood ratio statistic (under standard regularity conditions that are met here) has an approximate chisquare distribution with degrees of freedom equal to the difference in the number of parameters in the full and the reduced models. The difference in the number of parameters estimated in the two models (again ignoring the “50Stroke; 500Temp; NewMethod” combination where there were no failures) is $22 - 12 = 10$ degrees of freedom. The approximate p -value for the test comparing these two different models is $\Pr(\chi_{10}^2 > 6.6) = 0.237$. This indicates that the differences among the slopes in Figure 3 can be explained by chance alone.

2.4 Residual analysis

Residual analysis is used to detect possible departures from a fitted model and is an important part of any regression analysis. Censoring complicates the analysis of residuals, but the ideas and methods are basically the same as those described in standard regression text books. Residual analysis for censored data is described specifically in Nelson (1973), Nelson (1990), and Meeker and Escobar (1998).

Figure 5 is a Weibull probability plot of the residuals for the floating scale model. This plot provides a clear assessment of the Weibull distributional assumption, pooling all of the available data after they have been standardized to a common scale. Assessment of the adequacy of the distributional assumption at this stage of the modeling process has the advantage that the assessment can be done without the influence and possible bias introduced by the structure of a regression model.

The knee in the lower tail of the distribution in Figure 5 results from deviation in the two smallest residuals. This kind of deviation can be expected from chance alone. This can be demonstrated by using Monte Carlo simulations like those described in Section 6.6.1 of Meeker and Escobar (1998). With repeated generation of pseudo-random Weibull samples, behavior like that seen in the lower tail of the distribution in Figure 5 is not uncommon. Thus it appears that the fatigue life data can be described adequately by a Weibull distribution.

A lognormal analysis (details not included here) also provided a reasonable fit to the data, but it is not as good as the Weibull fit.

3 Response Surface Model Analysis

This section describes the construction and evaluation of a model that relates spring fatigue life to the factors in the experiment.

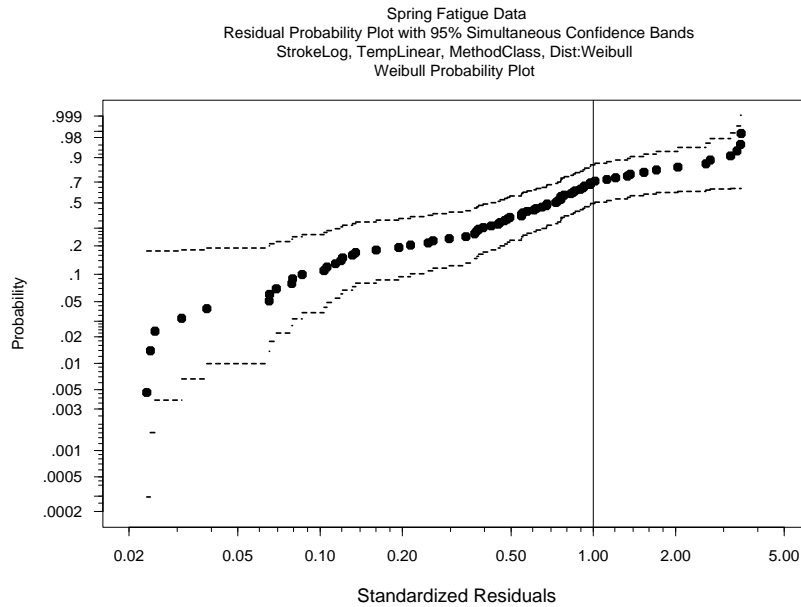


Figure 5: Weibull probability plot of the spring accelerated life test data residuals under the floating scale model.

3.1 Acceleration/response surface model

The response surface model suggested by the engineers was

$$\mu = \beta_0 + \beta_1 \log(\text{Stroke}) + \beta_2 \text{Temp} + \beta_3 X \quad (3)$$

where $X = 0$ for Method = New and $X = 1$ for Method = Old (known as the “contrast treatment” method of coding dummy variables in S-PLUS). The log transformation for Stroke was chosen on the basis of previous experience and tradition. There was no previous experience relating the processing temperature to life so no transformation was used.

The results from fitting this model are given in Figure 6 and summarized in Table 3. This figure is similar to Figure 4 except that now the $\eta = \exp(\mu)$ values for each test condition are given by relationship in (3). ML estimates of the regression coefficients are all statistically different from 0. This can be seen by noting that none of the confidence intervals contain zero. The response surface model allows computation of an estimate of $F(t)$ at condition “50Stroke; 500Temp; NewMethod” shown, the right-most line on Figure 6, even though there were no failures at those conditions.

Table 3: ML estimates of the linear response surface model for the spring accelerated life test data.

Spring Fatigue Data

Maximum likelihood estimation results:

Response units: Kilocycles

Weibull Distribution

Relationship(s)

1 Stroke: Log

2 Temp: Linear

3 Method: Class

Model formula:

Location \sim g(Stroke) + Temp + Method

Log likelihood at maximum point: -625.8

Parameter	Approx Conf. Interval			
	MLE	Std.Err.	95% Lower	95% Upper
(Intercept)	32.026951	2.4843571	27.157700	36.8962012
g(Stroke)	-5.509575	0.5872085	-6.660482	-4.3586675
Temp	-0.000883	0.0002709	-0.001414	-0.0003521
Method	-1.272388	0.1475136	-1.561510	-0.9832671
sigma	0.569491	0.0539010	0.473067	0.6855691
weibull.beta	1.755954	0.1661969	1.458642	2.1138651

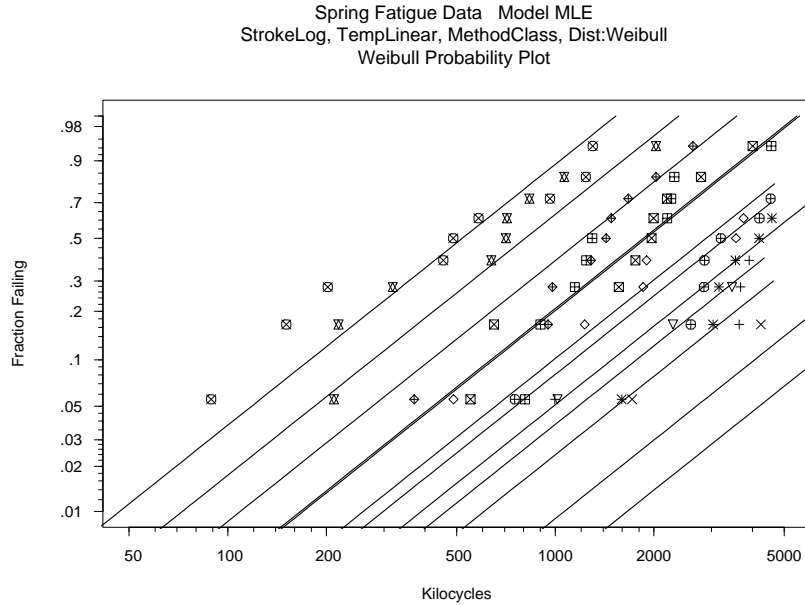


Figure 6: Weibull probability plot of the spring accelerated life test data with ML response surface estimates of $F(t)$.

3.2 Test for departure from the acceleration/response surface model

To assess the adequacy of the response surface model, we can use Figure 6 to compare the non-parametric estimates (the plotted points) with the fitted $F(t)$ lines, at each of the combinations of experimental factors. Because of the additional constraint of the relationship in (3) between the location of the distributions and the explanatory variables, there will be more deviations between the plotted points on nonparametric estimates and the fitted Weibull $F(t)$ lines in Figure 6 than in Figure 4.

To test whether such deviations are statistically important, as opposed to being explainable by the natural random variability in the data, under the relationship in (3), we can again do a likelihood ratio test, this time comparing the results in Tables 2 and 3. The total log likelihood values from the corresponding models are -623.9 and -625.8 , respectively. The log likelihood ratio statistic for the comparison is $Q = 2 \times (-623.9 - (-625.8)) = 3.8$. The difference in the number of parameters estimated in the two models (again ignoring the “50Stroke; 500Temp; NewMethod” combination where there were no failures) is $12 - 5 = 7$. The approximate p -value for the test comparing these two different models is $\Pr(\chi_7^2 > 3.8) = 0.1975$, indicating that the differences between the two models can be explained by chance alone. This implies that there is not any strong evidence for lack

of fit in the fitted regression model.

3.3 Testing for interactions

Although the relationship in (3) appears to fit the data well, it is important to make sure that there is no evidence of interaction in the data. To do such a check, we fit the following model

$$\begin{aligned} \mu &= \beta_0 + \beta_1 \log(\text{Temp}) + \beta_2 \text{Stroke} + \beta_3 X \\ &+ \beta_4 \log(\text{Temp}) \times \text{Stroke} + \beta_5 \log(\text{Temp}) \times X + \beta_6 \text{Stroke} \times X \end{aligned} \quad (4)$$

that adds two-factor interactions to the additive model in (3). As in (3), $X = 0$ for Method = New and $X = 1$ for Method = Old. Details of the model fit are not given here, but the total log likelihood for this model was -624.6 which is very close to the value of -623.9 for model (3). The log likelihood ratio statistics for the comparison is $Q = 2 \times (-624.6 - (-623.9)) = 2.4$ with a difference in the number of parameters of $8 - 5 = 3$. The corresponding p -value is $\Pr(\chi_3^2 > 2.4) = 0.716$. Thus there is no evidence for interaction.

3.4 Residual diagnostics

Residual plots reveal departures from a fitted model. A traditional residual plot for this purpose plots the residuals versus the fitted $\eta = \exp(\mu)$ values from the model. Such a plot for the spring fatigue life data and relationship in (3) is shown in Figure 7. In this example, there is one vertical line of points for each of the twelve combinations of the explanatory variables (although the fitted values for two of the combinations are so close together that it is difficult to see any separation). The triangles indicate right-censored residuals, corresponding to right-censored observations. Thus the actual residual, had there been no censoring, would have been larger (higher in Figure 7). Recognizing the meaning of the censored residuals, this plot does not indicate any apparent deviation from the assumed model.

3.5 Comparison of old and new springs

One of the purposes of the experiment was to compare the new and the old processing methods with respect to fatigue life. Figure 8 is a conditional model plot, giving estimates of the quantiles of the fatigue life distribution for the new and old methods, conditional on values of the other factors fixed at $\text{Temp} = 600$ and $\text{Stroke} = 20$, the nominal values of these variables. The densities are actually smallest extreme value densities, corresponding to Weibull distributions being plotted on a log response axis.

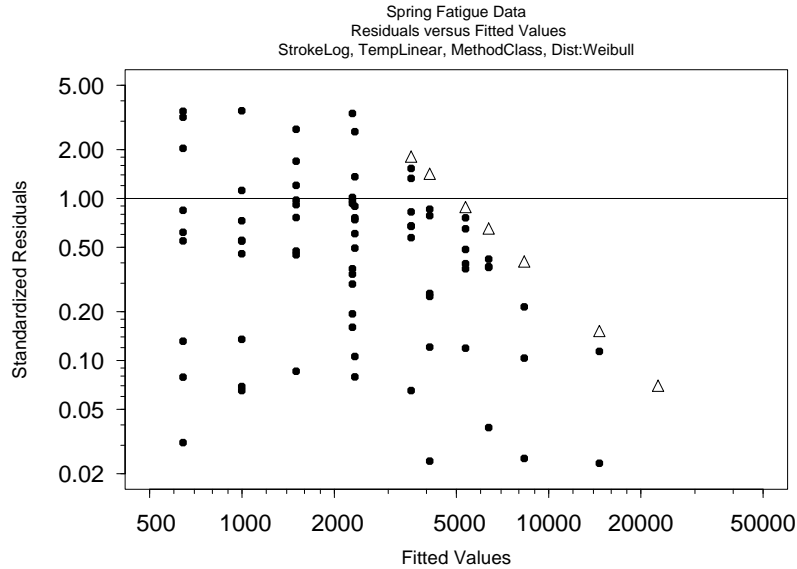


Figure 7: Plot of the spring accelerated life test data residuals versus fitted values $\eta = \exp(\mu)$ from the model using (3).

Figure 8 suggests that the new method will produce springs with a longer fatigue life. Quantifying this finding, the coefficient corresponding to MethodOld in Table 3 is -1.272 . Under the constant Weibull shape parameter model, this quantity has the interpretation of the difference between quantiles of the distributions of the old and new methods, on the log scale (e.g., $\mu_{\text{Old}} - \mu_{\text{New}}$). Alternatively, the ML estimate of any given quantile (such as B10) of the fatigue life distribution for the new method is $\exp(\mu_{\text{Old}} - \mu_{\text{New}}) = \exp[-(\mu_{\text{New}} - \mu_{\text{Old}})] = \exp(1.272) = 3.57$ times larger than that for the old method. Again taking numbers from Table 3, a 95% confidence interval for this improvement factor is

$$[\exp(0.9832672), \exp(1.561510)] = [2.67, 4.77].$$

Thus there is strong statistical evidence that the new processing method results in springs with a longer fatigue life distribution.

3.6 Estimate of B10 at nominal conditions

Figure 9 is similar to Figure 6, except that it shows the ML estimate for $F(t)$ for the new processing method with Temp = 600 and Stroke = 20, the nominal values of these variables. This plot provides

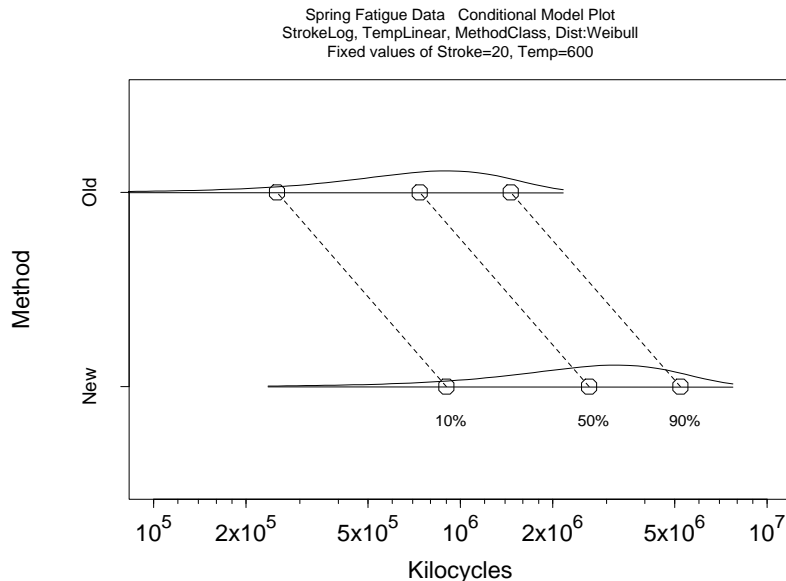


Figure 8: Conditional model plot showing the effect of processing method on spring life.

a visualization of the distribution of primary interest and the amount of extrapolation needed to make the desired inference.

The ML estimate of the 0.10 quantile (B10) of the fatigue life for the new processing method at $\text{Temp} = 600$ and $\text{Stroke} = 20$ is 900 megacycles. A normal approximation 95% confidence interval for B10 is [237 3,412] megacycles. The details for how to compute this estimate and the associated confidence interval are given in Section 19.2.4 of Meeker and Escobar (1998). Although the ML estimate exceeds the target value of 500 megacycles by a sizable margin, the lower confidence bound leaves some doubt as to whether the new spring will meet the reliability target if operated at 20 mils.

4 Effect of Stroke Displacement on Spring Life

4.1 Conditional model plot

Figure 10 is a conditional model plot showing the fatigue life of springs manufactured with the new method at $\text{Temp} = 600$, as a function of Stroke. This plot also provides a useful visualization of extrapolation to $\text{Stroke} = 20$ mils. Putting life on the horizontal axis is common practice in the fatigue literature when plotting cycles as a function of time.

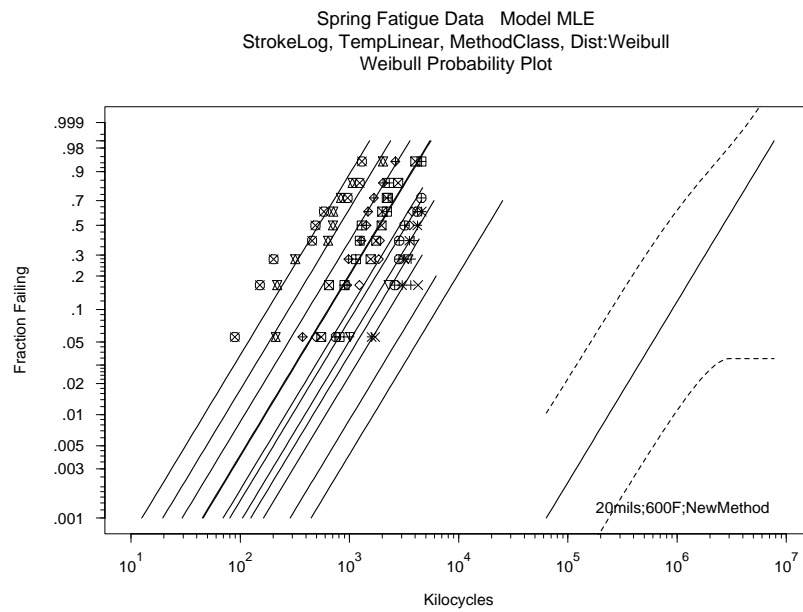


Figure 9: Weibull probability plot of the spring accelerated life test data with ML response surface estimates for the relationship in (3) with extrapolation to stroke displacement of 20 mils and normal approximation 95% pointwise confidence intervals.

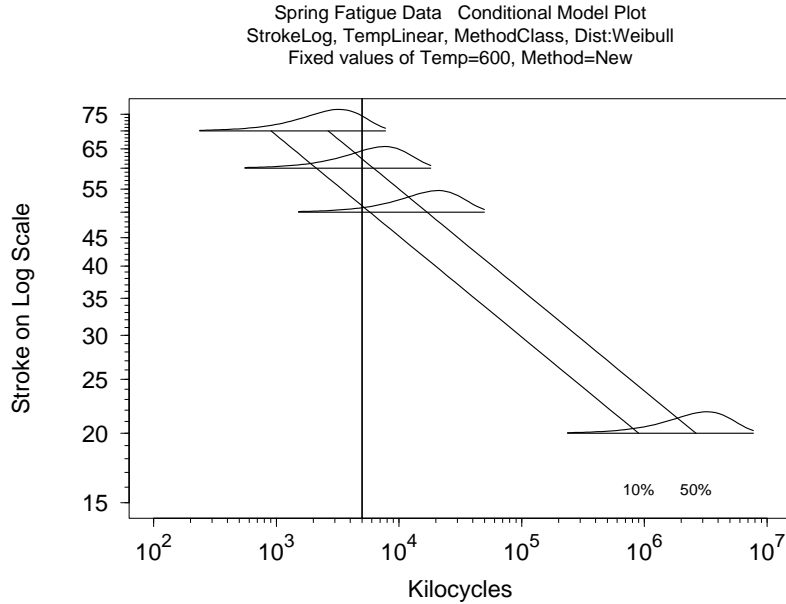


Figure 10: Conditional model plot showing the relationship between spring life and stroke displacement at 600°F for the new processing method.

The confidence intervals shown in Figure 9 shows that there is a large amount of uncertainty in the estimate of $F(t)$ at the nominal use conditions. This is primarily due to the large amount of extrapolation. It is important to recognize, however, that the width of the confidence interval reflects only statistical uncertainty due to a limited sample size. The interval does *not* reflect possible model error. In applications (such as the present application) model error could be substantially large. We investigate potential model error in the next section.

4.2 Sensitivity to the assumed form of the stroke-life relationship

The authors of the articles in Saltelli, Chan, and Scott (2000) describe different approaches to sensitivity analysis. One general, but useful, approach is to expand the formulation of the model by adding a parameter or parameters and investigating the effect of perturbing the added parameter(s), to see the effect on answers to questions of interest.

We take this approach here by extending the model in (3). We start by replacing $\log(\text{Stroke})$ with the more general Box-Cox transformation (Box and Cox 1964) on Stroke. In particular, we fit the model

$$\mu = \beta_0 + \beta_1 W + \beta_2 \text{Temp} + \beta_3 X \quad (5)$$

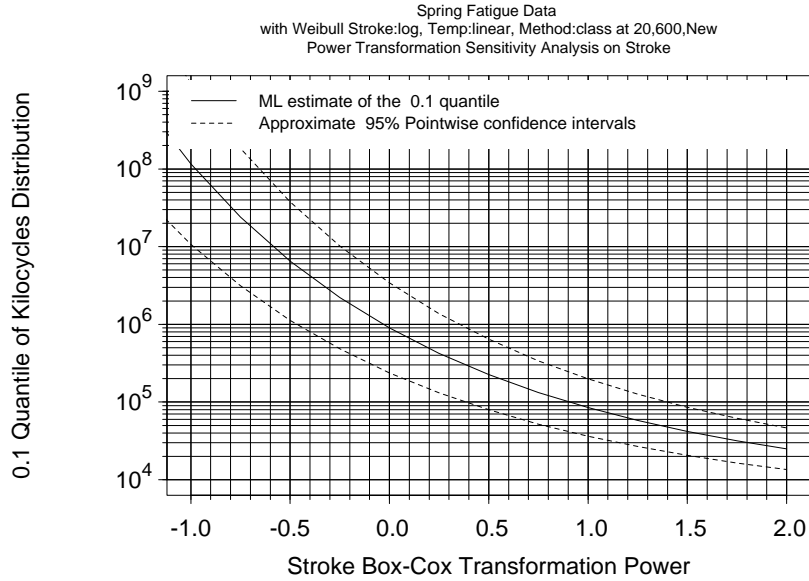


Figure 11: Plot of the ML estimate of the 0.10 quantile of spring life at 20 mils, 600°F, using the new method versus the Stroke displacement Box-Cox transformation parameter λ with 95% confidence limits.

where

$$W = \begin{cases} \frac{(\text{Stroke})^\lambda - 1}{\lambda} & \lambda \neq 0 \\ \log(\text{Stroke}) & \lambda = 0. \end{cases} \quad (6)$$

and, as in (3), $X = 0$ for Method = New and $X = 1$ for Method = Old. The Box-Cox Transformation (Box and Cox 1964) was originally proposed as a simplifying transformation for a response variable. Transformation of explanatory variables, however, provides a convenient extension of our regression modeling choices. Note that because W is a continuous function of λ , (6) provides a continuum of transformations for possible evaluation and model assessment. The Box-Cox transformation parameter λ can be varied over some range of values (e.g., -1 to 2) to see the effect of different stroke-life relationships on the fitted model and inferences of interest. The results from the analyses can be displayed in a number of different ways.

For the spring fatigue life example, Figure 11 is a plot of the 0.10 Weibull quantile estimates versus λ between -1 and 2 . Approximate confidence intervals are also given. Note that $\lambda = 0$ corresponds to the log transformation that is commonly used in fatigue life versus stress models. Also, $\lambda = 1$ corresponds to no transformation (or, more precisely, a linear transformation that affects

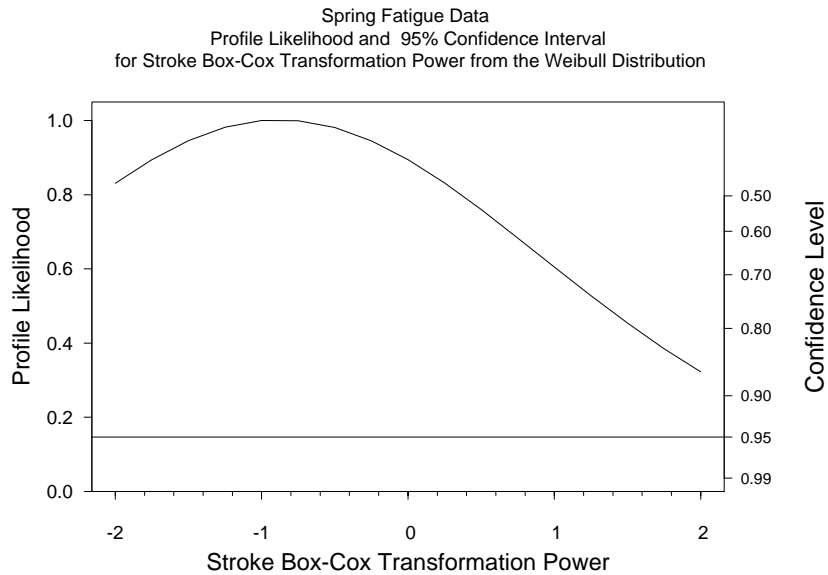


Figure 12: Profile likelihood plot for the Stroke Box-Cox transformation parameter λ in the spring life model.

the regression parameter values but not the underlying structure of the model). Figure 11 shows that fatigue life decreases by more than an order of magnitude as λ moves from 0 to 1. In particular, the ML estimate of the 0.10 quantile decreases from 900 megacycles to 84 megacycles when λ is changed from 0 to 1.

Figure 12 is a profile likelihood plot for the Box-Cox λ parameter, providing a visualization of what the data say about the value of this parameter. In this case the peak is at a value of λ close to 0; this is in agreement with the commonly used fatigue life/stress model. Values of λ close to 1 are less plausible, but cannot be ruled out, based on these data alone.

The engineers, based on experience with the same failure mode and similar materials, felt that the actual value of λ was near 0 (corresponding to the log transformation) and almost certainly less than 1. Then a conservative decision could be made by designing with an assumed value of $\lambda = 1$. Then, the somewhat optimistic evaluation in Section 4 would become somewhat pessimistic, relative to the 500 megacycle target.

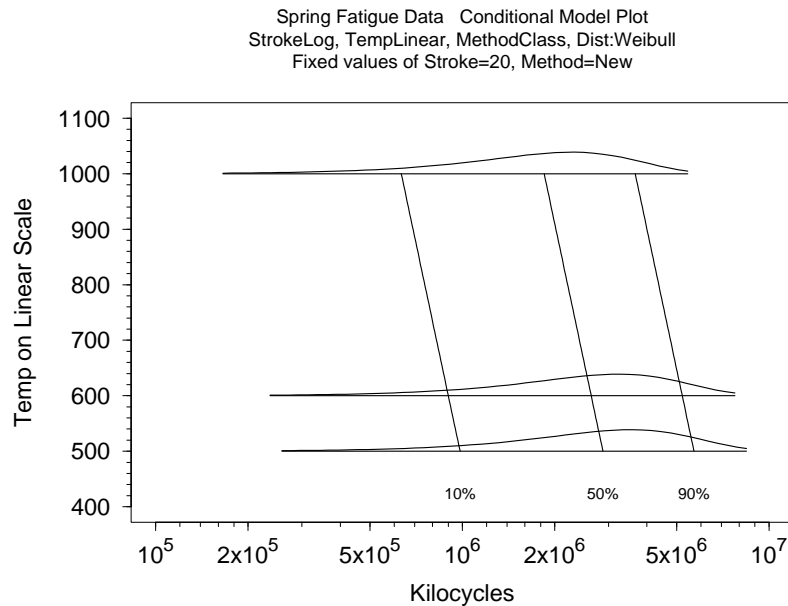


Figure 13: Conditional model plot showing the relationship between spring life and processing temperature for Stroke = 20 mils and the new processing method.

4.3 Sensitivity to the assumed form of the temperature-life relationship

The same kind of sensitivity study can be done with temperature. We omit the details here, as they are similar to the presentation in Section 4.2, but we present the graphical results. Figure 13 is a conditional model plot showing the fatigue life of springs manufactured with the new method at Stroke = 20 mils, as a function of Temp. This plot suggests that fatigue decreases somewhat with the level of this processing temperature. The nominal value of 600°F is, however, in the high-life region. The engineers were also concerned about the adequacy of the assumed relationship between fatigue life and Temp, because they had no previous experience modeling temperature. Figure 14 is similar to Figure 11, except that it is the temperature relationship that is being perturbed. The figure shows that the estimates of the fatigue life distribution are not highly sensitive to the transformation power λ . Interestingly, the profile likelihood for the Temp Box-Cox transformation parameter λ (not shown here) is perfectly flat. This is because the data (with only two levels of temperature) do not provide any information about the nature of the transformation.

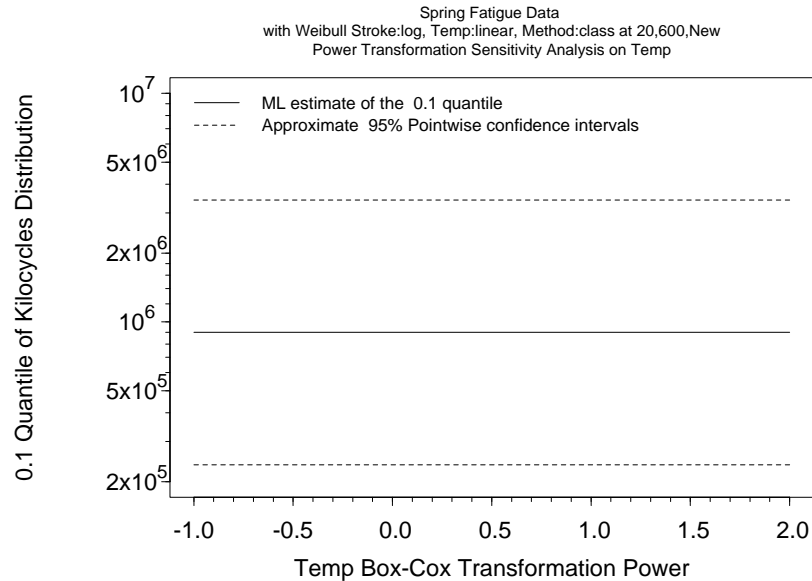


Figure 14: Plot of the 0.10 quantile of spring life versus the temperature Box-Cox transformation parameter λ with 95% confidence limits.

4.4 Sensitivity to the assumed distribution

The Weibull distribution fits the data well and it is easy to demonstrate that, in the extrapolation to the lower tail of the distribution, the Weibull distribution will give predictions of life that are shorter than those given by the lognormal distribution. To confirm this we can compare directly estimates from the two different distributions. Figure 15 is similar to Figure 11, except that instead of giving confidence intervals, plots of the 0.10 Weibull and lognormal quantiles versus λ are shown. The plot shows that the lognormal distribution estimates are optimistic relative to the Weibull distribution by about a factor of 1.3 over this range of λ . The factor for the .01 quantile is approximately 2.

5 Concluding Remarks

It is often suggested that the extrapolation involved in accelerated testing requires the use of a model based on the physics or chemistry of the failure mechanism. While such a theoretical basis for extrapolation is clearly important and desirable, there are situations where important decisions need to be made with a model that is not firmly grounded in such theory. Due to limited time and resources that preclude the timely development of such theory, alternative approaches are needed.

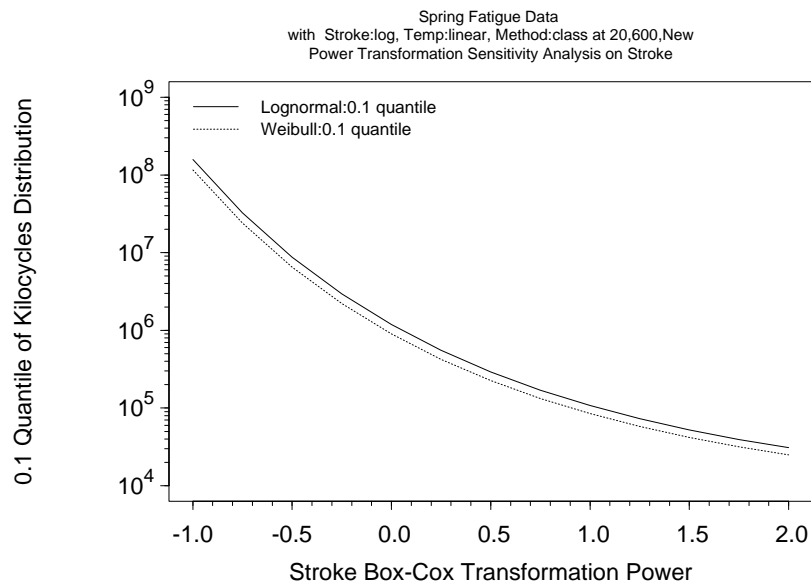


Figure 15: Plot of the 0.10 quantile of spring life versus the stroke displacement Box-Cox transformation parameter λ for the Weibull and lognormal distributions.

Most commonly, empirical models are used, based on previous experience and engineering judgment. Because of the uncertainty in such models, sensitivity analyses becomes especially important.

This paper shows how one can use sensitivity analyses to explore the effect that perturbations to the assumed model have on inferences. Even when a model based on the physics or chemistry of the failure mode is available, such sensitivity analyses are still important.

Acknowledgments

We would like to thank Wayne Nelson, Wallace Blischke, and Pra Murthy for helpful comments on earlier versions of this paper.

References

- Box, G. E. P., and Cox, D. R. (1964), An analysis of transformations (with discussion), *Journal of the Royal Statistical Society, Series B* **26**, 211-252.
- Condra, L. W. (2001), *Reliability Improvement with Design of Experiments*, Second Edition.

Marcel Dekker: New York.

Meeker, W. Q. and Escobar, L. A. (1998), *Statistical Methods for Reliability Data*. John Wiley & Sons: New York.

Meeker, W. Q. and Escobar, L. A. (2002), *SPLIDA User's Manual*. Available from www.public.iastate.edu/~splida.

Nelson, W. (1973), Analysis of residuals from censored data, *Technometrics*, **15**, 697–715.

Nelson, W. (1990), *Accelerated Testing: Statistical Models, Test Plans, and Data Analyses*. John Wiley & Sons: New York.

Pascual, F. G. and Meeker, W. Q. (1999), Estimating Fatigue Curves with the Random Fatigue-Limit Model (with discussion). *Technometrics* 41, 277-302.

Saltelli, A., Chan, K, and Scott, E. M. (2000), Editors, *Sensitivity Analyses*. John Wiley & Sons: New York.

Wu, C. F. J. and Hamada, M. (2000) *Experiments: Planning, Analysis, and Parameter Design Optimization*. John Wiley & Sons: New York.

Exercises:

1. Use SPLIDA (or other available software) to replicate the analyses in this chapter.
2. Compare the plots and the total log likelihood values from steps 4 and 5 in Appendix A. What does this tell you? (The difference in the number of parameters estimated in the two steps is $22 - 12 = 10$. A log likelihood difference of $\chi^2_{.80,10}/2 = 6.721$ or more between the log likelihood values might be considered to be big enough to be statistically important.)
3. What information did the conditional model plot in step 8 above provide?
4. Overall, which explanatory variable (Temp or Stroke) seems to have a more important effect over the range of values used in the experiment? How can you tell?
5. If the old processing method had to be used, what would be a safe level of stroke displacement such that one could be 95% confidence that B10 will exceed 500 megacycles (500,000 kilocycles) if the processing temperature is 600°F?
6. For the temperature relationship sensitivity analysis, the likelihood profile plot for the Box-Cox parameter is perfectly flat? Why?

7. The estimate of fatigue life at the nominal use conditions 20Stroke;600Temp;NewMethod is highly sensitive to the transformation used for the Stroke variable but not very sensitive to the transformation used for the Temp variable. Explain why.
8. In Section 4.2 it was noted that the Box-Cox transformation is a continuous function of the parameter λ . To see this, show that

$$\lim_{\lambda \rightarrow 0} \frac{x^\lambda - 1}{\lambda} = \log(x)$$

9. Explain why the Box-Cox transformation with $\lambda = 1$ is, in terms of inferences on the failure time distribution, the same as no transformation.
10. Repeat the analysis in this paper using instead the lognormal distribution. How do the results compare within the range of the data? How do they compare outside of the range of the data?

Appendix

A SPLIDA Commands for the Analyses

This appendix gives explicit direction on how to use the SPLIDA (Meeker and Escobar 2002) software to do the the analyses described in this paper.

1. Use the data frame `NewSpring` (an example built into SPLIDA) to make the life data object `NewSpring.ld`, using `Stroke`, `Temp`, and `Method` as explanatory variables. `Status` is the censoring variable. Use `Splida -> Make/edit/summary/view data object -> Summary/view data object` or the object browser to view `NewSpring.ld`.
2. First use `Splida -> Multiple regression (ALT) data analysis -> Censored data pairs plot` to get scatter plots for all pairs of variables. Note that censored observations are denoted in the plots by an open triangle (Δ) symbol.
3. Use `Splida -> Multiple regression (ALT) data analysis -> Censored data scatter plot` to make a scatter plot of the lifetimes versus `Temp` and lifetime versus `Stroke`. Use a log axes for life.
4. Use `Splida -> Multiple regression (ALT) data analysis -> Probability plot and ML fit for individual conditions` to obtain a probability plot analysis to allow a comparison of the failure-time distributions for the different combinations of levels of the explanatory variables. Choose the Weibull distribution for analyses.

5. Use Splida -> Multiple regression (ALT) data analysis -> Prob plot and ML fit for indiv cond: common shapes (slopes) to fit a model that has the same distribution shape at each combination of the explanatory variables, but allows the scale of the distribution to float.
6. Use Splida -> Multiple regression (ALT) data analysis -> Probability plot and fit of regression (acceleration) model to begin fitting different regression models to the data. Choose Stroke, Temp, and Method (in that order) as the explanatory variables. Specify the nominal use conditions and New method as 20;600;New under "Specify new data for evaluation" on the Basic page of the dialog box. On the Model page, specify a log relationship for Stroke and a linear relationship for Temp. Visit the Tabular output page and request tables of failure probabilities and quantiles at 20;600;New. Click Apply and examine the results.
7. Use Splida -> Regression residual analysis -> Residuals versus fitted values to obtain plots of the residuals versus the fitted values to look for evidence of lack of fit for models that you fit.
8. Use Splida -> Multiple regression (ALT) data analysis -> Conditional model plot to get a plot of the estimates of the Spring life distribution as a function of Stroke when temperature is 600°F with the New processing method. On the Plot options page, request evaluation for Stroke over the range of 15 to 90 mils.
9. Do a similar evaluation, letting temperature vary from 400°F to 1000°F when Stroke=20 mils, for the new processing method.
10. Use Splida -> Multiple regression (ALT) data analysis -> Sensitivity analysis plot to check the sensitivity of estimates of B01 to the assumed relationships for Stroke when Stroke is 20 mils and Temp is 600°F, and the processing method is "New." On the Other inputs page, Specify the evaluation powers by entering -2,2,.5 in the appropriate cell. Then click on "Apply."

Appendix

B Spring Accelerated Life Test Data

Table 4: The spring accelerated life test data.

Kilocycles	Stroke	Temp	Method	Status	Weight
5000	50	500	New	Suspended	9
3464	60	500	New	Failed	1
1016	60	500	New	Failed	1
2287	60	500	New	Failed	1
5000	60	500	New	Suspended	6
2853	70	500	New	Failed	1
3199	70	500	New	Failed	1
752	70	500	New	Failed	1
2843	70	500	New	Failed	1
4196	70	500	New	Failed	1
2592	70	500	New	Failed	1
4542	70	500	New	Failed	1
5000	70	500	New	Suspended	2
997	50	500	Old	Failed	1
3904	50	500	Old	Failed	1
3674	50	500	Old	Failed	1
3644	50	500	Old	Failed	1
5000	50	500	Old	Suspended	5
2193	60	500	Old	Failed	1
2785	60	500	Old	Failed	1
4006	60	500	Old	Failed	1
1967	60	500	Old	Failed	1
1756	60	500	Old	Failed	1
650	60	500	Old	Failed	1
1995	60	500	Old	Failed	1
1563	60	500	Old	Failed	1
551	60	500	Old	Failed	1

continued on next page

Kilocycles	Stroke	Temp	Method	Status	Number
211	70	500	Old	Failed	1
319	70	500	Old	Failed	1
712	70	500	Old	Failed	1
707	70	500	Old	Failed	1
2029	70	500	Old	Failed	1
638	70	500	Old	Failed	1
1065	70	500	Old	Failed	1
834	70	500	Old	Failed	1
218	70	500	Old	Failed	1
4241	50	1000	New	Failed	1
1715	50	1000	New	Failed	1
5000	50	1000	New	Suspended	7
3158	60	1000	New	Failed	1
3545	60	1000	New	Failed	1
4188	60	1000	New	Failed	1
4583	60	1000	New	Failed	1
1595	60	1000	New	Failed	1
3030	60	1000	New	Failed	1
5000	60	1000	New	Suspended	3
2196	70	1000	New	Failed	1
808	70	1000	New	Failed	1
2257	70	1000	New	Failed	1
1147	70	1000	New	Failed	1
1296	70	1000	New	Failed	1
1243	70	1000	New	Failed	1
2309	70	1000	New	Failed	1
4563	70	1000	New	Failed	1
901	70	1000	New	Failed	1
489	50	1000	Old	Failed	1
3756	50	1000	Old	Failed	1
1230	50	1000	Old	Failed	1
3562	50	1000	Old	Failed	1
1898	50	1000	Old	Failed	1
1855	50	1000	Old	Failed	1
5000	50	1000	Old	Suspended	3

continued on next page

Kilocycles	Stroke	Temp	Method	Status	Number
1670	60	1000	Old	Failed	1
1481	60	1000	Old	Failed	1
371	60	1000	Old	Failed	1
2630	60	1000	Old	Failed	1
1285	60	1000	Old	Failed	1
2031	60	1000	Old	Failed	1
951	60	1000	Old	Failed	1
1429	60	1000	Old	Failed	1
980	60	1000	Old	Failed	1
963	70	1000	Old	Failed	1
1240	70	1000	Old	Failed	1
1301	70	1000	Old	Failed	1
455	70	1000	Old	Failed	1
151	70	1000	Old	Failed	1
488	70	1000	Old	Failed	1
202	70	1000	Old	Failed	1
89	70	1000	Old	Failed	1
583	70	1000	Old	Failed	1
